

REZAPLAK®

FLOOR FORMWORK

MAN-HANDLED SOLUTION FOR FLOOR FORMWORK AND LOST CASING

- Grammage 2.950 g / m²
- Resistance 12.72 Kg / cm²

1.20 M

2.40 M

POLYPROPYLENE SHEET
HONEYCOMB CORE



PLYWOOD FILME
2.5X1.25M - THICKNESS 15MM

Between
25 et 38
(according to brands)

8.50g


REZAPLAK
2.4X1.2M - THICKNESS 12MM

3X MORE LIGHT



TECHNICAL CHARACTERISTICS & BENEFITS

- Light weighted, in order to reduce MSDs risks and drudgery
- Man-handled
- 100% recyclable
- Re-usable +/- 10 times
- At the end of life the product can be used as lost casing
- Easy to work the product
- Effective inertness/weight ratio (honeycomb core)

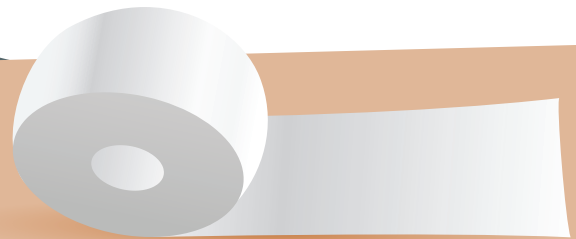

Additional product

REZAPLAK-AdM® (Foam Adhesive)
REZAPLAK-AdL® (Smooth Adhesive)
Adhesive for jointing REZAPLAK

ANY QUESTION ?
04 73 78 57 41

siib France
Groupe MABAMURE

RÉZAPLAK-AdM[®]
(smooth version RÉZAPLAK-AdL[®])

- 1 Avoid laitance leaks
- 2 No sanding (time gain)
- 3 Reduces MSDs risks
- 4 The BNORUB increases the REZAPLAK's lifetime (protects the edges)

REZAPLAK

LAMBOURDE

ETAI

Maximum spacing 12cm

PERFECT SLAB FORMWORK WITH MODULAR PANELS



ENVIRONMENTAL PROTECTION

100% recyclable
Polypropylene